


MSC Software: Case Study - Achates Power

The Path to Better Fuel Efficiency

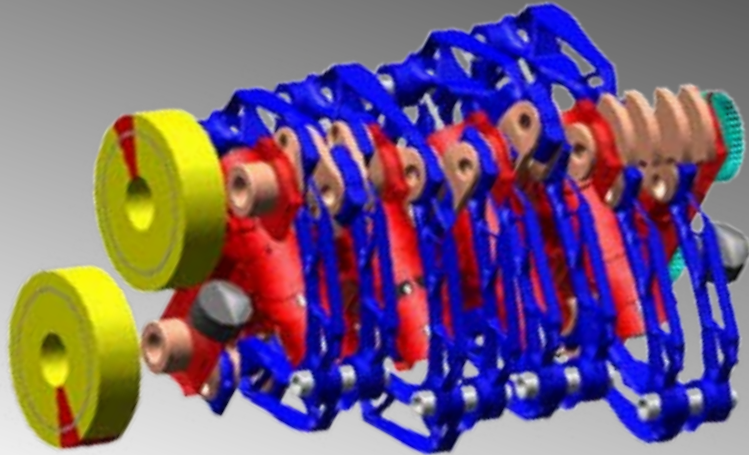

Achates Power, Inc. is developing a lightweight, low-emissions and low fuel consumption two-stroke, opposed-piston diesel engine designed as a modular and scalable mechanism termed A40. Achates Power places heavy emphasis on modeling and simulation through state-of-the-art analytical tools and methods.

Within the structural dynamic analysis arena, the focus is on overall dynamics, such as torsional and bending vibrations, including torsional vibration damper (TVD) and flywheel layouts, as well as (hydrodynamic) bearing analysis. The emphasis is on identifying areas of conceptual, structural and dynamic improvement with regard to overall dimensions and weight. A hybrid approach is utilized, thus combining the advantages of multi-body simulation (MBS) and finite element analysis (FEA).

This case study discusses the application of structural dynamic simulation based on MSC Adams software with regard to:

- The influence of the engine block support structure sensitivity on bearing loads: The A40 opposed piston engine has comparably small main bearing loads relative to the peak cylinder pressure (PCP) due to the partial cancellation of forces during the opposed motion of the reciprocating masses. This allows for aggressive weight optimization of the support structure while maintaining sufficient bearing support.
- The mitigation of gear resonances: The two crankshafts of the mechanism are timed by a set of gears. During testing, a gear resonance within the operating speed range was detected that induced a substantial load on the neighboring main bearings. A sensitivity study was performed to find the optimum solution for removing the resonance from the speed range.

Key Highlights:

Industry

Automotive

achatesPOWER

Challenge

Develop a light-weight, low-emissions, and low fuel-consumption diesel engine

MSC Software Solutions

MSC Adams with FEV Virtual Engine powered by Adams

Benefits

- Confirmed structural integrity
- Optimized components
- Weight reduction



“The Adams model has subsequently been used to perform an extensive parameter study to find the root cause and solutions to the observed gear resonance.”

Christina Exner, Achates Power, Inc.

Introduction

A world with finite supplies of petroleum and limits on carbon dioxide emissions demands fundamentally better engines with increased fuel efficiency. Compared to conventional engines currently on the market, opposed piston diesel engines have a thermodynamic advantage (no heat rejection into cylinder heads) and the potential for lower friction (no valve-train and low piston side loads) leading to substantially better fuel efficiency. A further advantage of this engine architecture is the decreased cost due to a lower parts count while maintaining ordinary manufacturing methods. Opposed-piston engines, besides their thermodynamic advantages, naturally have a weight advantage over conventional engine architectures due to being a two-stroke engine and due to the lower complexity of the engine mechanism. To further reduce weight, while maintaining adequate durability, advanced analysis methods are required that combine multi-body simulation (MBS), finite element analysis (FEA), optimization and fatigue analysis.

Adams-based FEV Engine has been used as the MBS software of choice combined with component mode synthesis (FEA software) to reduce the number of degrees of freedom

(DOFs) of core components like the crankshaft and engine block while retaining nearly complete structural information. This approach allows for reasonable runtimes in order to explore a large range of operating conditions while maintaining full component interaction.

Model

In an opposed-piston engine, two facing pistons in a single cylinder come together at top dead center and move apart under combustion.

The opposed-piston A40 engine architecture incorporates an innovative mechanism to drive the pistons. The two pistons are being connected to two crankshafts via six connecting rods per cylinder with the intent to create a purely axial piston motion and ideally no piston side forces. The connecting rods are in permanent tension and thus, lead to main bearing reaction forces feeding into the block rather than the bearing cap. In addition, the nature of the A40 opposed piston motion leads to partial cancellation of the combustion forces. These two effects allow for a lightweight support structure. The two crankshafts are connected via a gear train and a single flywheel is mounted on the output shaft. Figure 1 illustrates one view of the A40 4-cylinder cranktrain model in the

flexible support structure in addition to a rear view of the gear train. The mechanism may appear complex at first sight but, in actuality, it is composed of approximately half the number of components of a conventional engine.

The results demonstrated in this work will focus on a 4-cylinder version of the Achates Power A40 engine.

With the different levels of refinement offered in the Adams software, the cranktrain was moved from a purely kinematic component model with rigid components and constraint bearings into a fully flexible model supported by hydrodynamic bearings. The Adams software conveniently allows for replacing any component with its flexible representation and thus, increasing the accuracy of the analysis.

The software combines the advantages of a general purpose, open architecture MBS code with an engine component library. Hence, it provides “push button” implementation of engine-specific components like the connecting rods, pistons and many others. As a result, the requirement of this multi-crankshaft and multiple connecting rods-per-cylinder mechanism is adequately supported within Adams.

The timing gear module has been used to model the gear train dynamics including gear



Figure 1: FEV Virtual Engine (powered by Adams) Crank Train model with Flexible Components and Rear View of the Gear Train

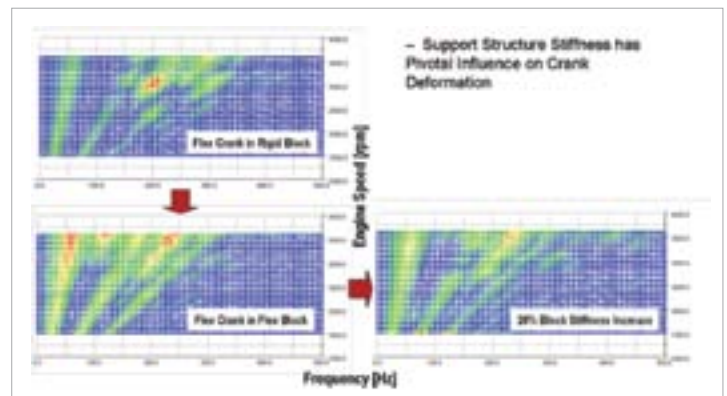


Figure 2: Support Structure Sensitivity, Influence on Crank Bending

contact and backlash and thus, allowing for full component interaction in the mechanism. The gear stiffness and cold backlash have been determined experimentally and provided as input to the model. Based on the gear attachment locations, material combination and temperature, the backlash under the operating temperature has been calculated. As backlash and meshing errors can cause significant impulsive excitation of the whole mechanism, it is crucial to accurately model these parameters.

Approach

A hybrid approach of MBS and FEA has been chosen for the structural dynamic analysis of the A40 mechanism. The first step of this approach determines the modal-neutral file (MNF) of the crankshaft and block based on the Craig-Bampton method [1, 2]. The method allows the selection of a subset of DOFs that are preserved during the modal reduction that can be used as interface nodes in the MBS model. For example, placing such DOFs at the bearing locations allows for convenient monitoring of bearing deflections under various engine operating conditions. The advantage behind modal reduction is the greatly reduced number of DOFs, while maintaining near complete modal (inertia and stiffness tensor) information along with the modal stress.

As a second step, the component MNFs are imported into the Adams model in order to achieve the best possible representation of the structural stiffness of the mechanism. The third step involves setting the boundary conditions, like gas pressure traces, oil viscosity and temperature which can be easily accomplished within Adams. Lastly, the MBS analysis is performed to analyze various aspects of engine dynamics: torsional and bending vibrations, the effect of torsional vibration damper (TVD) and flywheel lay-outs, as well as bearing analysis. In this scenario, particular emphasis has been placed on identifying areas of structural and dynamic improvement that would result in a reduction of overall dimensions and weight.

At Achates Power, Inc., this hybrid approach is routinely used in all stages of development including sensitivity studies and root cause analyses. The approach is

continuously being improved and refined in the area of component optimization and durability analysis. Additionally, the modal stresses and participation factors are superimposed and reverted into a stress tensor as basis for subsequent fatigue analysis (not described here).

Support Structure Sensitivity

In the A40 mechanism, the port timing is generated by the respective phasing of the exhaust and intake connecting rods. The two counter-rotating crankshafts are identically symmetric and in phase. Therefore, the combustion forces are partially cancelled. As previously cited, the reverse architecture leads to main bearing forces that react to the block/crankcase rather than to the main bearing caps. These two effects allow for a lightweight support structure in relation to the PCP achieved with the Achates Power A40 engine.

Early on in testing, it became apparent that the limitations for the structure's weight reduction would be determined by its capacity to support the crankshafts. The torsional and bending deflections of the crankshaft are a first indication for durability and noise and vibration harshness (NVH). The analysis started with a rigid block structure, which was subsequently replaced by a flexible representation.

The fully-coupled crankshaft bending results from incremental block refinements are shown in Figure 2.

As expected, the block representation has hardly any influence on the crank torsional behavior (not shown). However, the impact on the crank bending is significant. With the rigid block, a dominant 4th order excitation is observed with a resonance at 3,000 rpm. In comparison, the response of the flexible block shows all orders from one through four with the frequency content shifted. Despite the crank-bending amplitudes satisfying the Achates Power requirements, a higher block stiffness would further reduce crank-bending. Hence, the block stiffness was artificially increased by 20 percent to demonstrate the improvement (see Figure 2).

In addition to investigating the effect of the block stiffness, the method can also be used to guide the design toward local stiffness improvements while keeping the weight down.



Figure 3: Maximum Gear Separation Force Over Engine Speed

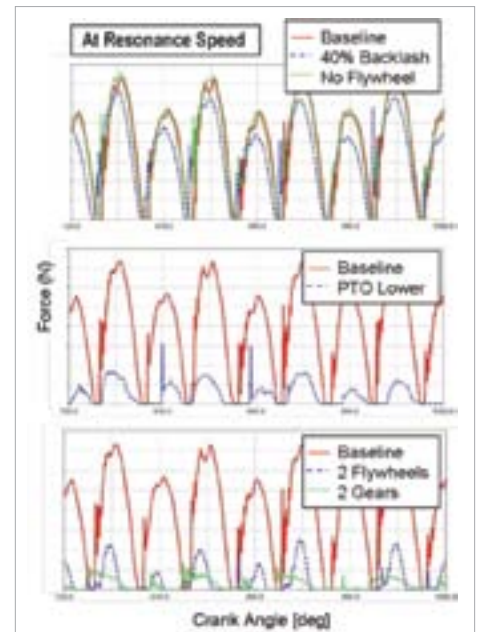


Figure 4: Selected Solutions of the Gear Resonance Mitigation Study

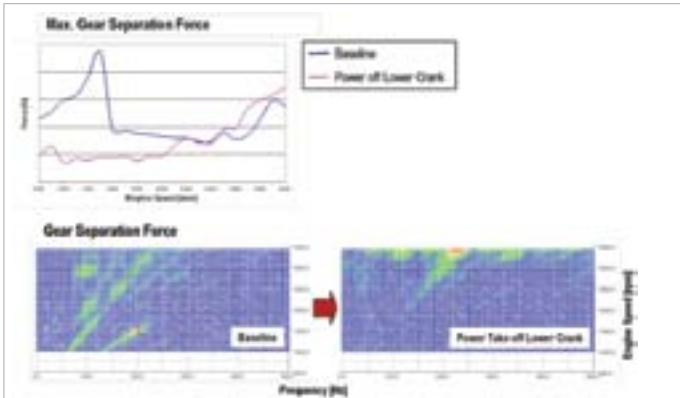


Figure 5: Solution for Gear Resonance: Power Take-off Moved to Lower Crankshaft

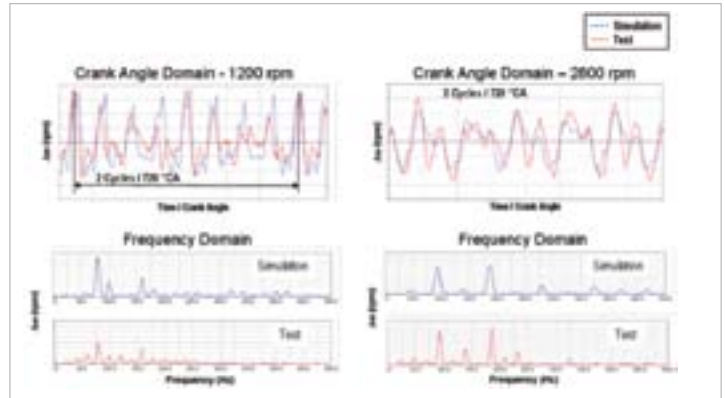


Figure 6: Correlation of Crank Nose Speed Fluctuation

Gear Resonance Mitigation

During the early A40 4-cylinder mechanism testing, a gear train noise/resonance was observed. Although this particular engine was only instrumented with two strain gage sensors, the measured gear train resonance has been qualitatively reproduced with the Adams VEngine model. The result is shown in Figure 3.

The Adams model has subsequently been used to perform an extensive parameter study to find the root cause and solutions to the observed gear resonance. From the many ideas of how to mitigate the gear resonance, only some selected results are presented here. The potential solutions are divided into three categories:

- No or minor impact on the mechanism design
- Medium impact on the mechanism design
- Major impact on the mechanism design

The solutions in the first category include, among others, the reduction of gear backlash and flywheel inertia. From a tolerance and manufacturability standpoint, the backlash could be reduced to as low as 40 percent of the current design backlash leading to a bearing load reduction of only 20 percent which is deemed insufficient. The reduction of the flywheel inertia to 50 percent of its original value, or a complete removal of the flywheel (zero inertia), has very little if any impact on the resonance characteristics. Interestingly, the dynamic study shows that the engine could be run entirely without flywheel which would save 13.7 kg in the overall engine weight.

In the second category, two solutions involving architectural changes seem promising: moving

the power-take-off to the lower crank or helical gears. The former approach shows the best results when combined with TVD and flywheel inertia tuning. This solution has been pursued in design but not yet in hardware. In addition, due to presence of gear separation under any given load situation and for NVH reasons, helical gears become the solution of choice.

Solutions from the third category would involve significant redesign and impact on engine package. For example, a single flywheel on the output shaft could be replaced with one flywheel on each of the crankshafts, using two large gears instead of the four gears, or moving the TVDs to the rear end of the crankshaft. Even though all of these modifications are holding some promise, the redesign effort is best incorporated into future engine designs.

Each of the graphs in Figure 4 show time domain data at 1,500 rpm resonance speed.

In order to account for even minor speed shifts, a full speed sweep has been run for each case. Figure 5 illustrates the results of the speed sweep as a shift of the resonance above the current speed limit of 2,800 rpm.

Correlation

Among other correlation efforts, the crank nose speed fluctuation has been measured with a crank angle encoder. The comparison between test and simulation is shown in Figure 6.

Two speeds are shown within Figure 6. One speed is below the gear resonance and the other is in the upper speed range of the engine (see also top of Figure 5). With the exception of a slight over-prediction of the 4th order

contribution, the correlation between simulation and test at 1,200 rpm is already very good. However, at 2,800 rpm, the frequency and time correlation is excellent.

Summary and Conclusion

The increasingly demanding emissions and fuel consumption requirements are not only a challenge for the performance prediction, but also for the structural dynamic aspects during the engine development process.

This case study outlines a suitable method for evaluating the structural viability of an engine architecture. Additionally, the potential for supporting structural improvement, root cause and solution analysis have been demonstrated with the Achates Power A40 architecture serving as the example. The simulation shows the importance of capturing the effects of a flexible support structure and integrating cranktrain and gear-train dynamics.

With the selected approach it is possible to evaluate the influence of the support structure and gear interaction effects under specific engine working conditions. This approach also allows for clear design recommendations based on the analytical results.

Most importantly, the analysis confirmed the structural integrity and sound design of the Achates Power, Inc. A-40 mechanism and permutations thereof. The Achates Power, Inc. A-40 is a viable mechanism and an effective means of power output for an opposed-piston engine.

About MSC Software

MSC Software is one of the ten original software companies and the worldwide leader in multidiscipline simulation. As a trusted partner, MSC Software helps companies improve quality, save time and reduce costs associated with design and test of manufactured products. Academic institutions, researchers, and students employ MSC technology to expand individual knowledge as well as expand the horizon of simulation. MSC Software employs 1,000 professionals in 20 countries. For additional information about MSC Software's products and services, please visit: www.mscsoftware.com.

**Please visit
www.mscsoftware.com
for more case studies**

About MSC Adams

Adams is the most widely used multibody dynamics and motion analysis software in the world. Adams helps engineers to study the dynamics of moving parts, how loads and forces are distributed throughout mechanical systems, and to improve and optimize the performance of their products.

Traditional "build and test" design methods are now too expensive, too time consuming, and sometimes even impossible to do. CAD-based tools help to evaluate things like interference between parts, and basic kinematic motion, but neglect the true physics-based dynamics of complex mechanical systems. FEA is perfect for studying linear vibration and transient dynamics, but way too inefficient to analyze the large rotations and other highly nonlinear motion of full mechanical systems.

Adams multibody dynamics software enables engineers to easily create and test virtual prototypes of mechanical systems in a fraction of the time and cost required for physical build and test. Unlike most CAD embedded tools, Adams incorporates real physics by simultaneously solving equations for kinematics, statics, quasi-statics, and dynamics. Utilizing multibody dynamics solution technology, Adams also runs nonlinear dynamics in a tiny fraction of the time required by FEA solutions. Loads and forces computed by Adams simulations improve the accuracy of FEA by providing better assessment of how they vary throughout a full range of motion and operating environments.

Corporate

MSC Software Corporation
2 MacArthur Place
Santa Ana, California 92707
Telephone 714.540.8900
www.mscsoftware.com

Europe, Middle East, Africa

MSC Software GmbH
Am Moosfeld 13
81829 Munich, Germany
Telephone 49.89.431.98.70

Asia-Pacific

MSC Software Japan LTD.
Shinjuku First West 8F
23-7 Nishi Shinjuku
1-Chome, Shinjuku-Ku
Tokyo, Japan 160-0023
Telephone 81.3.6911.1200

Asia-Pacific

MSC Software (S) Pte. Ltd.
100 Beach Road
#16-05 Shaw Tower
Singapore 189702
Telephone 65.6272.0082



The MSC Software corporate logo, MSC, and the names of the MSC Software products and services referenced herein are trademarks or registered trademarks of the MSC Software Corporation in the United States and/or other countries. All other trademarks belong to their respective owners. © 2011 MSC Software Corporation. All rights reserved.